

RVA 11W – PN 16 (10)


WAFER DREIESPJELDVENTILER

Typisk bruksområde: RSW & VVS

Temperaturområde: -15 / + 120 gr. C

Multi flenseboring: PN 16(10) / ANSI Cl. 150

Manuell betjening: DN 50 – 150 spak, DN 200 – 600 gir

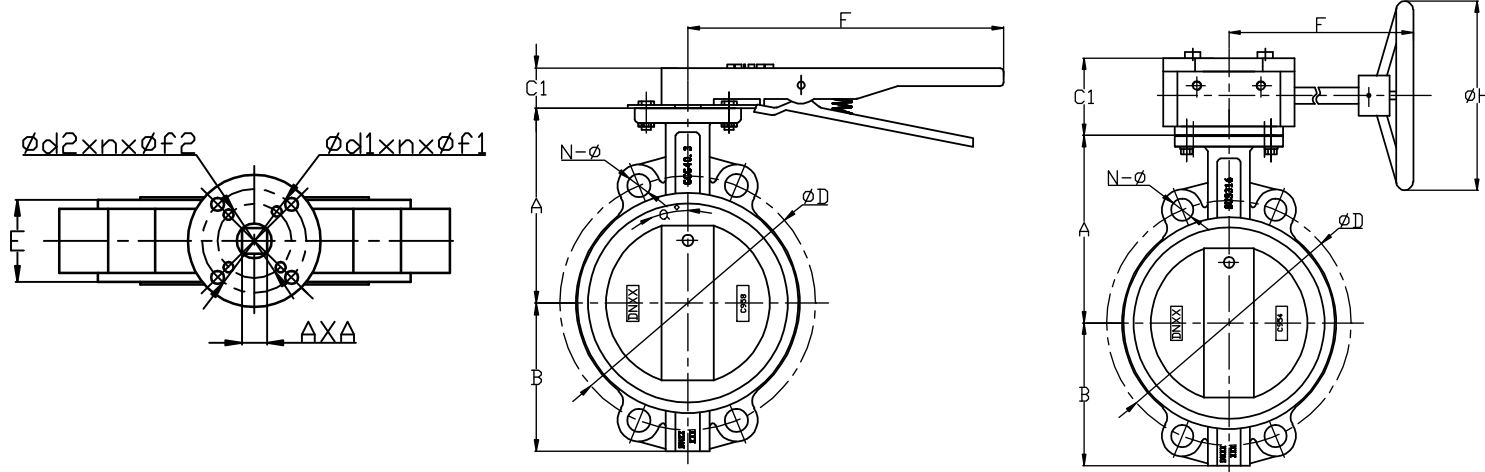

PART	MATERIALE
Hus	Seigjern GGG 40.3/EN-GJS-400-18
Spjeld	Alu/Brz C958
Spindel	AISI 316
Låsepin	Monel
Pakning	EPDM
Foringer	PTFE

DN	ART. NR. MANUAL	ART. NR. FREE TOP	AXA mm	ISO TOP	E mm	A mm	B mm	C mm	C1 mm	F mm	H mm	VEKT kg*	TRYKK KLASSE
40	5560461	5560041	11	F07	33	120	75	30	32	267		2,4	PN 16
50	5560462	5560042	11	F07	43	124	80	30	32	267		2,8	PN 16
65	5560463	5560043	11	F07	46	134	89	30	32	267		3,2	PN 16
80	5560464	5560044	11	F07	46	141	95	30	32	267		4,3	PN 16
100	5560465	5560045	14	F07	52	156	114	30	32	267		5,4	PN 16
125	5560466	5560046	14	F07	56	168	127	30	32	267		7,5	PN 16
150	5560467	5560047	17	F07	56	184	140	30	32	267		9,3	PN 16
200	5560468	5560048	17	F07/10	60	213	175	35	77	236	290	12,8	PN 10
250	5560469	5560049	22	F10	68	244	220	38	77	227	290	24,5	PN 10
300	5560471	5560051	27	F12	78	283	255	38	77	227	290	31,0	PN 10
350	5560472	5560052	27	F12	78	368	268	38	77	227	290	46,5	PN 10
400	5560473	5560053	36	F12	102	400	318	38	103	300	290	53,0	PN 10
450	5560474	5560054	36	F14	114	422	365	38	103	300	290	75,0	PN 10
500	5560475	5560055	36	F14	127	479	358	38	147	350	290	125,0	PN 10
600	5560476	5560056	46	F16	154	562	445	38	147	350	290	200,0	PN 10

EN 10204 – 3.1 Sertifikat tilgjengelig * Free top