

RVA 17LT – PN 16




LUG DREIESPJELDVENTIL

Typisk bruksområde: Skip & industri

Temperaturområde: -15 / + 80 gr. C

Flenseboring: PN 16

Manuell betjening: DN 200 – 300 gir

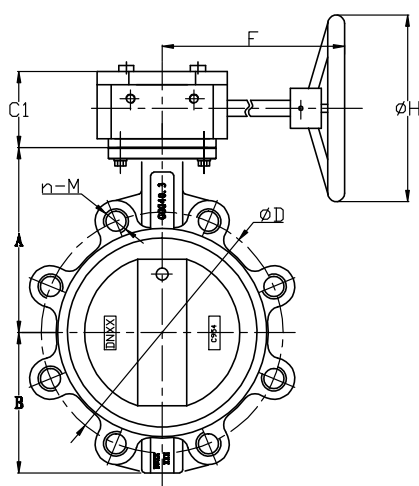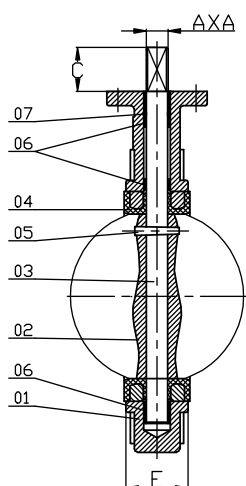

PART	MATERIALE
Hus	Seigjern GGG 40.3/EN-GJS-400-18
Spjeld	Alu/Brz C958
Spindel	AISI 316
Låsepin	Monel
Pakning	NBR / Nitril
Foringer	PTFE

DN	ART. NR. MANUAL	ART. NR. FREE TOP	AxA mm	ISO TOP	E mm	A mm	B mm	Ø mm	Ø1 mm	F mm	H mm	VEKT kg	TRYKK KLASSE
200		5560128	17	F07/10	60	213	175	35	77	236	290	17,0	PN 16
250		5560129	22	F10	68	244	220	38	77	227	290	28,2	PN 16
300		5560131	27	F12	78	283	255	38	77	227	290	44,0	PN 16

EN 10204 – 3.1 Sertifikat tilgjengelig * Free top