

RVA 19LT – PN 16 (10)




LUG DREIESPJELDVENTIL

Typisk bruksområde: Mineralsyrer, oljer og hydrokarboner

Temperatur område: -20 / + 135 gr. C

Flenseboring: PN 16 (10)

Manuell betjening: DN 50 – 150 spak, DN 200 gir

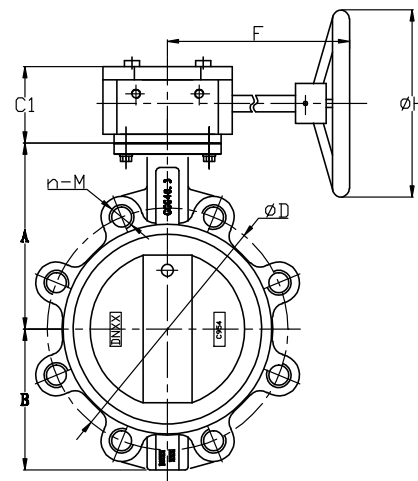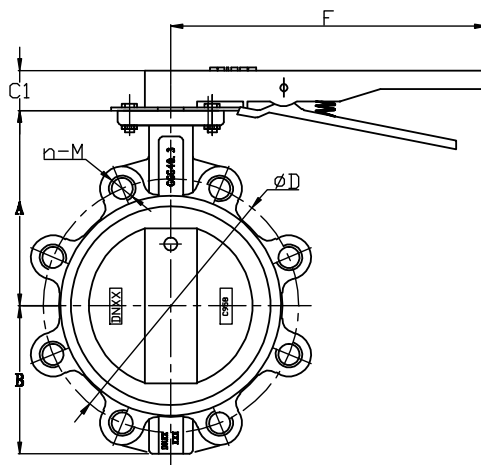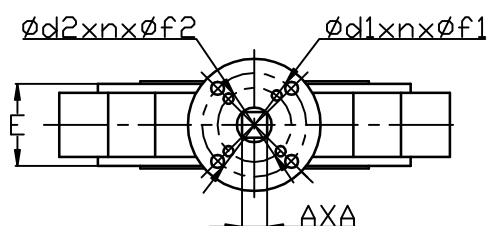

PART	MATERIALE
Hus	Seigjern GGG 40.3/EN-GJS-400-18
Spjeld	AISI 316
Spindel	AISI 316
Låsepin	Monel
Pakning	Viton
Foringer	PTFE

DN	ART. NR. MANUAL	ART. NR. FREE TOP	AxA mm	ISO TOP	E mm	A mm	B mm	Ø mm	Ø1 mm	F mm	H mm	VEKT kg	TRYKK KLASSE
50	5560362	5560242	11	F07	43	124	80	30	32	267		4,2	PN 16
65	5560363	5560243	11	F07	46	134	89	30	32	267		5,0	PN 16
80	5560364	5560244	11	F07	46	141	95	30	32	267		6,5	PN 16
100	5560365	5560245	14	F07	52	156	114	30	32	267		8,0	PN 16
125	5560366	5560246	14	F07	56	168	127	30	32	267		10,2	PN 16
150	5560367	5560247	17	F07	56	184	140	30	32	267		12,0	PN 16
200	5560368	5560248	17	F07/10	60	213	175	35	77	236	290	17,0	PN 10

EN 10204 – 3.1 Sertifikat tilgjengelig * Free top