




RVA 23W – PN 16 (10)

WAFER DREIESPJELDVENTIL I SYREFAST STÅL

Temperaturområde: -15 / + 120 gr. C

Multi flenseboring: PN 16(10) / ANSI Cl. 150

Manuell betjening: DN 50 – 150 spak, DN 200 – 600 gir

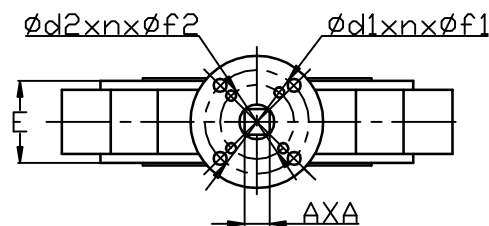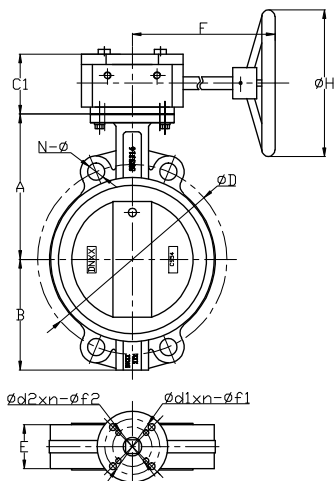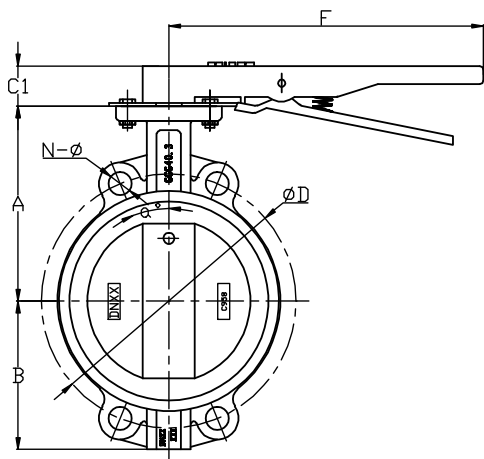

PART	MATERIALE
Hus	AISI 316
Spjeld	AISI 316
Spindel	AISI 316
Låsepin	Monel
Pakning	EPDM
Foringer	PTFE

DN	ART. NR. MANUAL SS LEVER	ART. NR. FREE TOP	AXA mm	ISO TOP	E mm	A mm	B mm	C mm	C1 mm	F mm	H mm	VEKT kg*	TRYKK KLASSE
40			11	F07	33	120	75	30	32	267		2,4	PN 16
50			11	F07	43	124	80	30	32	267		2,8	PN 16
65			11	F07	46	134	89	30	32	267		3,2	PN 16
80			11	F07	46	141	95	30	32	267		4,3	PN 16
100			14	F07	52	156	114	30	32	267		5,4	PN 16
125	070179	070169	14	F07	56	168	127	30	32	267		7,5	PN 16
150			17	F07	56	184	140	30	32	267		9,3	PN 16
200			17	F07/10	60	213	175	35	77	236	290	12,8	PN 10
250			22	F10	68	244	220	38	77	227	290	24,5	PN 10
300			27	F12	78	283	255	38	77	227	290	31,0	PN 10
350			27	F12	78	368	268	38	77	227	290	46,5	PN 10
400			36	F12	102	400	318	38	103	300	290	53,0	PN 10
450			36	F14	114	422	365	38	103	300	290	75,0	PN 10
500			36	F14	127	479	358	38	147	350	290	125,0	PN 10
600			46	F16	154	562	445	38	147	350	290	200,0	PN 10

EN 10204 – 3.1 Sertifikat tilgjengelig * Free top