

SIKKERHETSVENTIL

GØTZE 618 S

Typisk bruksområde: Messing sikkerhetsventil for vesker og luft.

Justeringsområde:

0,2 – 0,8 Bar

0,5 – 2,5 Bar


12 – 20 Bar

Max. temperatur:

130° C



DETALJ	MATERIALE
Hus	Messing – RG.5
Innvendige deler	Messing
Pakning	Perbunan

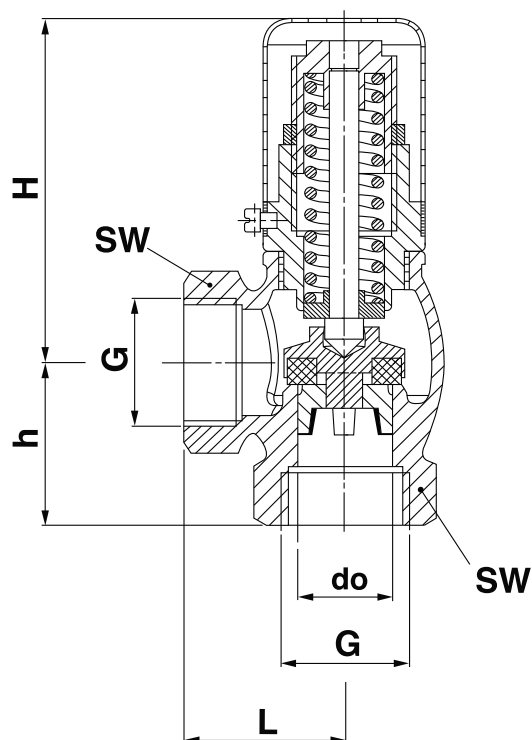

GJENGER	ART. NR.	TRYKK	L mm	H mm	H mm	DO mm	VEKT kg
3/8"	140001	2 – 12 bar	25,0	55,0	26,0	10,0	0,25
3/8"	–	0,2 – 08 bar	25,0	55,0	26,0	10,0	0,25
1/2"	140002	2 – 12 bar	30,0	62,0	30,0	13,0	0,35
1/2"	–	0,2 – 08 bar	30,0	62,0	30,0	13,0	0,35
3/4"	140003	2 – 12 bar	33,0	73,0	35,0	19,0	0,55
1"	140004	2 – 12 bar	40,0	90,0	41,0	25,0	0,90
1 1/4"	140005	2 – 12 bar	45,0	110,0	45,0	30,0	1,60
1 1/2"	140006	2 – 12 bar	50,0	130,0	51,0	38,0	2,20
2"	140007	2 – 12 bar	60,0	135,0	60,0	50,0	3,10

Kan også leveres med teflonpakning: Gøtze 604.T.