

SKRÅSETE TILBAKESLAGSVENTIL – PN 40

Fulltløp Gjenger: BSP, ISO – 228 Gjenger

Materiale: S/S; EN10213 – 4:1.4408;

ASTM A351 – CF8M

Trykk: 40 bar

Test: Iht. API – 598 (EN12266 – 1,2)


Temp.: -20°C to 200°C (-4°F to 392°F)

Åpningstrykk:

0,1 Bar



NR.	PART	MATERIALE
1	Hus	EN1.4409
2	Deksel	EN1.4409
3	Setedeksel	EN1.4409
4	Fjær	AISI 304
5	Skive	AISI 304
6	Mutter	AISI 304
7	Kjegle	P.T.F.E.
8	Pakning	P.T.F.E.

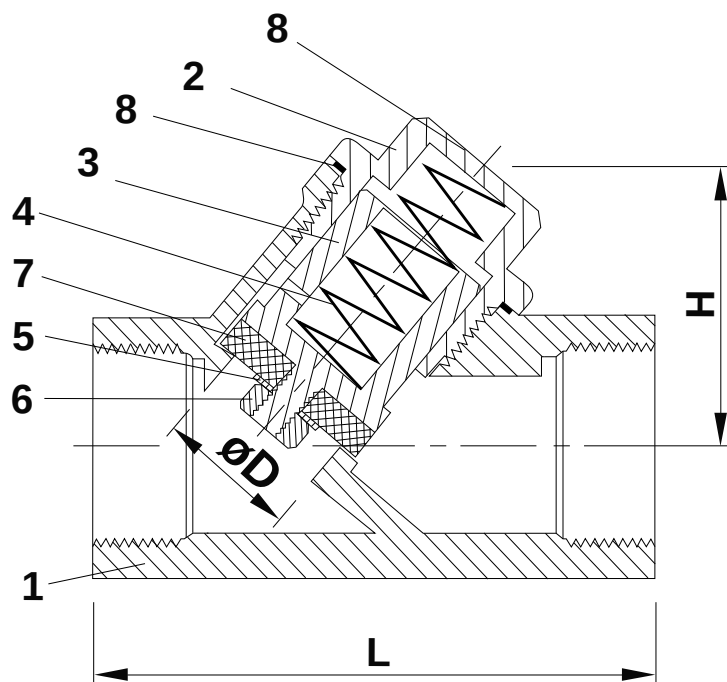

DIM/SIZE	DN	ART. NR. STOP	L mm	H mm	ØD mm	VEKT kg
1/4"	8	041120	57	32	10	0,25
3/8"	12	041121	57	32	10	0,25
1/2"	15	041122	61	37	15	0,28
3/4"	20	041123	70	41	20	0,40
1"	25	041124	86	47	25	0,60
1 1/4"	32	041125	100	54	32	0,90
1 1/2"	40	041126	111	62	38	1,15
2"	50	041127	138	76	51	1,65
2 1/2"	65	041128	170	110	65	3,60
3"	80	041129	195	130	80	5,00