



SLAMSAMLER M/RUSTFRI SIL

CIM 74/A

Typisk bruksområde: Vann, damp, olje, pressluft og nøytrale gasser.
Leveres med BSP gjenger.



DETALJ	MATERIALE
Hus	Støpt bronse
Plugg	Varmt smidd messing
Sil	Rustfritt stål
Pakning	IT 200 Max temp. 300°C

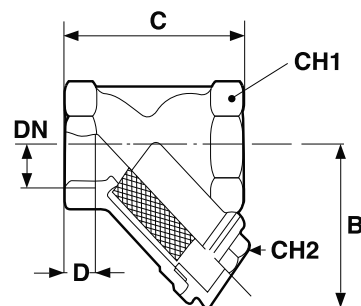

DIM	ART. NR.	B PRESSURE	C mm	D mm	CH1 mm	CH2 mm	VEKT kg
3/8"	4015502	38	56	11	23	18	0,19
1/2"	4015504	40	59	11	28	18	0,22
3/4"	4015506	46	68	12	34	22	0,32
1"	4015508	58	76	14	42	28	0,51
1 1/4"	4015512	70	92	15	52	34	0,72
1 1/2"	4015514	80	100	15	56	39	0,98
2"	4015516	100	125	18	70	55	1,68
2 1/2"	4015518	115	147	21	88	65	2,75
3"	4015522	136	175	24	103	75	3,95

SILKORG, RUSTFRI

CIM 74/A

Maksvidde:

3/8" – 2 1/2" = 0,65 mm

3" = 0,75 mm

DIM	ART. NR.	VEKT kg
3/8"	4015552	0,02
1/2"	4015554	0,02
3/4"	4015556	0,02
1"	4015558	0,04
1 1/4"	4015562	0,10
1 1/2"	4015564	0,20
2"	4015566	0,30
2 1/2"	4015568	0,40
3"	4015572	0,50