

SLUSEVENTIL CR

CIM 70/BS – CR - PN 20



Typisk bruksområde: Sluseventil for bruk på ikke-aggressive medier.

Max Arbeidstrykk:

1/4" – 4" : 20 bar.



DETALJ	MATERIALE
Hus	Messing EN 12165 CW 602N
Toppdeksel	Messing EN 12165 CW 602N
Spindel	Messing EN 12165 CW 602N
Innerdel	Messing EN 12165 CW 602N
Spindelring	Messing EN 12165 CW 602N
Toppdeksel pakning	Novus Supra
Pakkboks mutter	Messing EN 12165 CW 602N
Pakkboks pakning	P.T.F.E.
Pakkboks Ring	Messing EN 12165 CW 602N
Låsemutter	8.8 Galv.
Ratt	AluminiumN SI 12

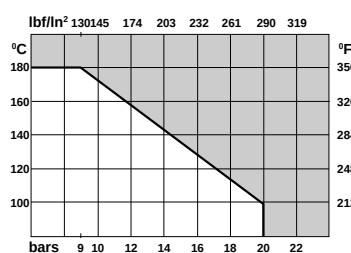

DIM	ART. NR.	A mm	B mm	C mm	D mm	CH1 mm	CH2 mm	CH3 mm	D mm	TORQUE NM	VEKT kg
1/4"	5504205	50	71	40	11,0	23	20	17	7	12	0,16
3/8"	5504209	50	71	40	11,0	23	20	17	7	12	0,16
1/2"	5504214	56	80	54	16,0	27	22	19	8	13	0,27
3/4"	5504219	60	97	59,0	16,3	32,5	24,0	21,0	8	19	0,41
1"	5504224	65	108	66	19,1	40,0	26,0	21,0	9	25	0,54
1 1/4"	5504229	78	121,5	74,0	21,4	48,8	32,0	25,0	10	32	0,82
1 1/2"	5504234	80	142	76,0	21,4	55,5	42,0	25,0	11	39	1,13
2"	5504239	93	165	86	25,7	68,5	52	29	12	51	1,83
2 1/2"	5504244	120	210	92	23	85,00	60	30	16	64	3,42
3"	5504249	140	247	98	25	101	80	37	17	77	5,15
4"	5504254	175	290	106	25	132	110	45	19	102	8,78