


SØMLØSE HYDRAULIKKRØR, AISI 316/316L

Syrefast AISI 316/316L, glødet – A269

Leveres i lengder på ca. 6 m

Materialsertifikat EN 10204-3.1 tilgjengelig

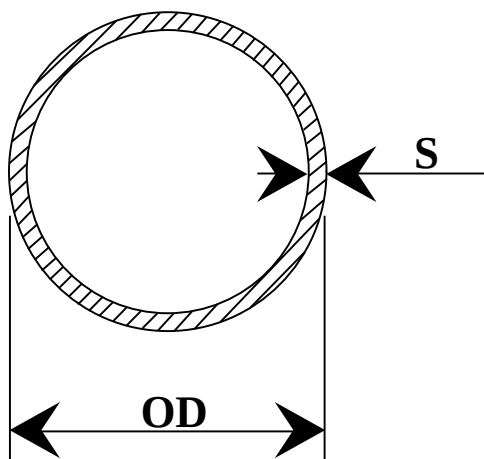

OD mm	S mm	VEKT kg/m	ART. NR
6,0	1,0	0,12	1800610
8,0	1,0	0,17	1800810
8,0	1,5	0,24	1800815
10,0	1,0	0,22	1801010
10,0	1,5	0,31	1801015
12,0	1,5	0,39	1801215
12,0	2,0	0,49	1801220
15,0	1,5	0,50	1801515
16,0	2,0	0,69	1801620
18,0	1,5	0,61	1801815
18,0	2,0	0,80	1801820
20,0	2,0	0,89	1802020
20,0	2,5	1,08	1802025
20,0	3,0	1,26	1802030
22,0	2,0	0,99	1802220
25,0	2,5	1,39	1802525
28,0	2,0	1,28	1802820
28,0	3,0	1,85	1802830
30,0	3,0	2,00	1803030
30,0	4,0	2,56	1803040
35,0	2,0	1,63	1803520
35,0	3,0	2,37	1803530
38,0	3,0	2,59	1803830
38,0	4,0	3,38	1803840
42,0	2,0	1,97	1804220
42,0	3,0	2,89	1804230
42,0	4,0	3,70	1804240