


SYREFAST, PRESSET T-RØR

Materiale AISI 316L / EN 1.4404

Sertifikat EN 10204-3.1 tilgjengelig

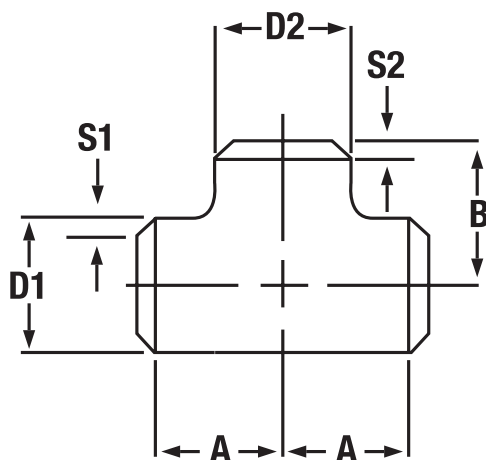

D1 mm	D2 mm	S1/S2 mm	B mm	A mm	VEKT kg	ART. NR
54	54	2,0	61	61	0,5	1914981
60,3	60,3	2,0	64	64	0,63	1935982
69	69	2,0	73	73	0,79	1915027
76,1	76,1	2,0	76	76	1,00	1935994
84	84	2,0	82	82	1,1	1915051
88,9	88,9	2,0	86	86	1,18	1936006
104,0	104,0	2,0	98	98	1,68	1915069
114,3	114,3	2,6	105	105	2,60	1936031
129,0	129,0	2,0	115	115	2,20	1915117
139,7	139,7	2,6	124	124	3,30	1936045
156	156	3,0	135	135	4,60	1915167
168,3	168,3	2,6	143	143	5,40	1936055
206	206	3,0	170	170	7,50	1915191
219,1	219,1	2,6	178	8,25	7,50	1936067
256	256	3,0	200	200	11,6	1915214
273	273	2,6	216	216	12,5	1936088
306	306	3,0	254	254	18,0	1915237
323,9	323,9	3,0	252	252	19,0	1936091
356	356	3,0	279	279	18,0	1915261
406	406	3,0	305	305	28,0	1936098
508	508	4,0				1936102