


SYREFASTE BEND 90°

Materiale AISI 316L / EN 1.4404

METRISK $R = D + 100$

ISO $R = 1,5 \times D$

Sertifikat EN 10204-3.1 tilgjengelig

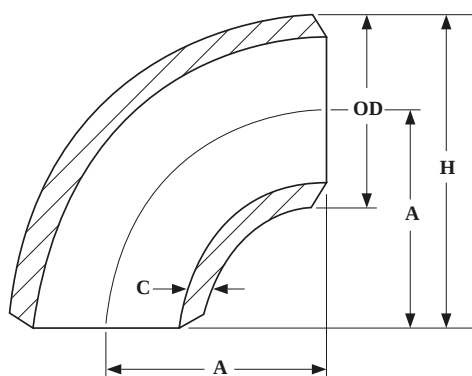

DN	OD mm	t mm	A mm	VEKT kg/m	ART. NR.
50	54,0	2,0	150	0,60	1906488
50	60,3	2,0	76	0,35	1911017
65	70,0	2,0	92	0,50	1905696
65	76,1	2,0	95	0,56	1911035
80	84,0	2,0	180	1,20	1906524
80	88,9	2,0	114	0,78	1911088
100	104	2,0	200	1,60	1906559
100	114,3	2,0	152	1,35	1911106
125	139,7	2,0	190	2,07	1911142
125	139,7	2,6	190	2,60	1911148
150	154	2,0	250	3,0	1906648
150	156	3,0	250	4,6	1906666
150	168,3	2,0	228	3,0	1911177
150	168,3	2,6	228	3,90	1911197
200	206	3,0	300	7,2	1906719
200	219,1	2,0	305	5,21	1911231
200	219,1	3,0	305	7,80	1911266
250	256	3,0	350	10,50	1906789
250	273,0	3,0	381	12,20	1911284
300	306,0	3,0	400	14,4	1906843
300	323,9	3,0	457	17,40	1911319
350	356,0	3,0	450	18,8	1906896
400	406,0	3,0	500	23,90	1906932
450	456,0	3,0	550	29,4	1906967
500	506,0	3,0	600	35,7	1907003
600	608,0	4,0	700	66,8	1907056