

TILBAKESLAGSVENTIL – PN 16


Metalltettende rettløps ventil med fjær.
Sikret deksel.

Max. arbeidstrykk:

16 bar 120°C / 12 bar 200°C



NR.	PART	MATERIALE
1	Hus	Bronze Rg5
2	Kjegle	Bronze Rg5
3	Pakning	PTFE
4	Fjær	1.4310 fjærstål

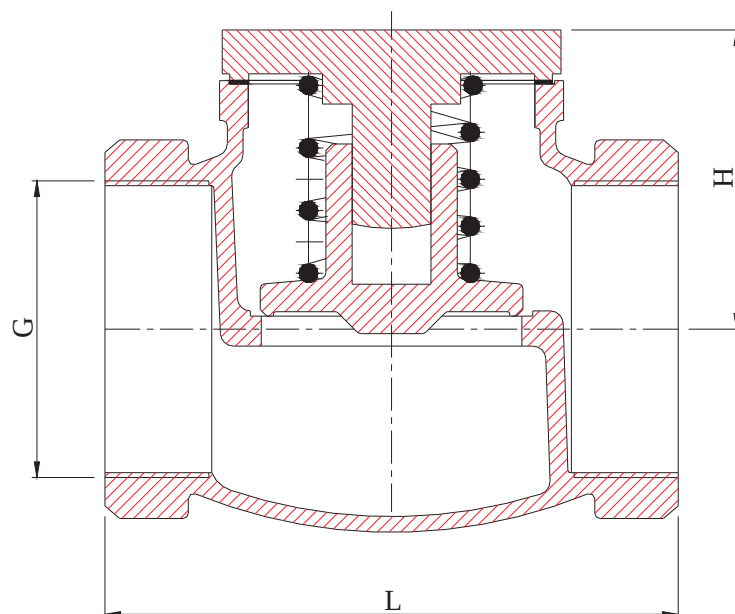

DIM	ART. NR.	DN	L mm	H mm	VEKT kg
3/8"	041130	10	60	40	0,30
1/2"	041131	15	65	40	0,40
3/4"	041132	20	75	45	0,50
1"	041133	25	90	50	0,90
1 1/4"	041134	32	105	55	1,30
1 1/2"	041135	40	120	60	1,90
2"	041136	50	145	70	3,00
2 1/2"	041137	65	170	85	6,00
3"	041138	80	200	95	7,50