


## TILBAKESLAGSVENTIL RØR/RØR\* (RHD)

### DIN 2353

Høytrykks tilbakeslagsventil med snittrings fittings i begge ender.

Åpningstrykk: 1bar

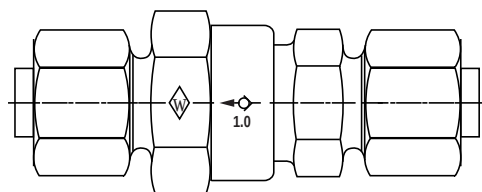

| RØR Ø<br>MM/SERIES | PN BAR | STÅL      |                      | SYREFAST STÅL 316 |                      | VEKT kg |
|--------------------|--------|-----------|----------------------|-------------------|----------------------|---------|
|                    |        | DIMENSJON | ART. NR.<br>Complete | DIMENSJON         | ART. NR.<br>Complete |         |
| 6                  | 400    | 6L        | 1349386              | 06L               | 1786403              | 0,10    |
| 8                  | 400    | 8L        | 1349387              | 08L               | 1786404              | 0,12    |
| 10                 | 400    | 10L       | 1349388              | 10L               | 1786405              | 0,15    |
| 12                 | 400    | 12L       | 1349389              | 12L               | 1786406              | 0,19    |
| 15                 | 400    | 15L       | 1349391              | 15L               | 1786407              | 0,27    |
| 18                 | 400    | 18L       | 1349392              | 18L               | 1786408              | 0,45    |
| 22                 | 250    | 22L       | 1349393              | 22L               | 1786409              | 0,62    |
| 28                 | 250    | 28L       | 1349394              | 28L               | 1786411              | 0,77    |
| 35                 | 250    | 35L       | 1349395              | 35L               | 1786412              | 1,68    |
| 42                 | 250    | 42L       | 1349396              | 42L               | 1786413              | 2,24    |
| 6                  | 400    | 6S        | –                    | 06S               | –                    | 0,10    |
| 8                  | 400    | 8S        | –                    | 08S               | –                    | 0,12    |
| 10                 | 400    | 10S       | –                    | 10S               | 1786416              | 0,15    |
| 12                 | 400    | 12S       | –                    | 12S               | 1786417              | 0,18    |
| 14                 | 400    | 14S       | –                    | 14S               | –                    | 0,20    |
| 16                 | 400    | 16S       | –                    | 16S               | 1786419              | 0,22    |
| 20                 | 400    | 20S       | –                    | 20S               | 1786421              | 0,66    |
| 25                 | 250    | 25S       | –                    | 25S               | 1786422              | 0,53    |
| 30                 | 250    | 30S       | –                    | 30S               | 1786423              | 0,81    |
| 38                 | 250    | 38S       | –                    | 38S               | 1786424              | 1,37    |