

WM ELEKTRISK AKTUATOR

ITQ


Teknisk data:

- Beskyttelsesklasse IP 67
- Endebrytere (4st)
- Ambivalent temperatur – 200 C – +700 C
- Varme element (5W)
- Kabelgjennomføring 2x M20
- Manuell nødbetjening



TILBEHØR

PK	RPC	CT
Potentiometer 1k – 10k	Positioner Input: 4 – 20 mA eller 0 – 10VDC Output: 4 – 20 mA eller 0 – 10VDC	Current transmitter 4 – 20 mA

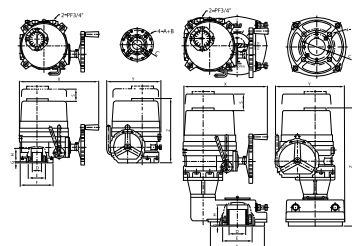

TYPE	ART. NR.	MOMENT (NM)	GANGTID	SPENNING (V)	EFFEKT (W)	ISO FLENS	VEKT kg
ITQ 004		40	18/15	24VDC	10	F03/F05/F07	3,00
ITQ 004	11341	40	18/15	230AC	10	F03/F05/F07	3,00
ITQ 008		80	16/18	24VDC	10	F05/F07	3,50
ITQ 008		80	16/14	230AC	10	F05/F07	3,50
ITQ 010		100	21/18	230AC	15	F07	7,00
ITQ 016		160	26/22	230AC	40	F07/F10	15,00
ITQ 024		240	26/22	230AC	40	F07/F10	15,00
ITQ 035		350	31/26	230AC	40	F10/F12	20,00
ITQ 050		500	31/26	230AC	90	F10/F12	20,00
ITQ 080		800	39/32	230AC	180	F12/F14	25,00
ITQ 110		1100	39/32	230AC	180	F12/F14	25,00

TYPE	FLENS	ISO 5211	C mm	A mm	B mm	D KEY	D SQU.	E mm	F mm	G mm	H mm	S mm	X mm	Y mm	Z mm
ITQ 0100	F07	–	Ø70	M8	14	Ø22	Ø20	Ø50	Ø88	3	37	100	258	172	220
ITQ 0160	F07	F10	Ø70	M8/M10	14/17	Ø25	Ø23	Ø58,5	Ø125	3	57	115	338	229	259
ITQ 0240	F07	F10	Ø70	M8/M10	14/17	Ø25	Ø23	Ø58,5	Ø125	3	57	115	338	229	259
ITQ 0350	F10	F12	Ø102	M10/M12	17/21	Ø40	Ø34	Ø80	Ø148	3	62	145	357	244	288
ITQ 0500	F10	F12	Ø102	M10/M12	17/21	Ø40	Ø34	Ø80	Ø148	3	62	145	357	244	288
ITQ 0800	F12	F14	Ø125	M12/M16	20/25	Ø48	Ø40	Ø95	Ø178	3	67	170	380	287	313
ITQ 1100	F12	F14	Ø125	M12/M16	20/25	Ø48	Ø40	Ø95	Ø178	3	67	170	380	287	313

MED GIR:

TYPE	FLENS	ISO 5211	C mm	A mm	B mm	D KEY	D SQU.	E mm	F mm	G mm	H mm	S mm	X mm	Y mm	Z mm
ITQ 1500	F16	–	Ø165	M20	32	Ø75	Ø64	Ø135	Ø245	5	90	145	368	293	506
ITQ 2000	F16	–	Ø165	M20	32	Ø75	Ø64	Ø135	Ø245	5	90	170	380	312	531
ITQ 3000	F16	–	Ø165	M20	32	Ø75	Ø64	Ø135	Ø245	5	90	170	380	312	531