


PLAN SVEISEFLENS, PN 6 & 10

Materiale S235JR RST 37.2

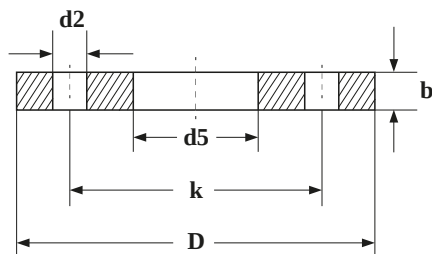

PN 6 – NS 2525

DN	RØR DIA	D5 mm	D mm	B mm	K mm	ANT. BOLTER	BOLT	D2 mm	VEKT kg	ART. NR.
150	168,3	170,5	265	20	225	8	M16	18	5,22	1254169
200	219,1	221,5	320	22	280	8	M16	18	7,15	1254179
250	273,0	276,0	375	24	335	12	M16	18	9,60	1254189
300	323,9	327,0	440	24	395	12	M20	22	12,60	1254194
350	355,6	359,0	490	26	445	12	M20	22	15,60	1254199
400	406,4	410,0	540	28	495	16	M20	22	18,40	1254209
450	457,0	461,0	595	30	550	16	M20	22	21,40	1254214
500	508,0	512,0	645	30	600	20	M20	22	24,60	1254219

PN 10 – NS 2526

DN	RØR DIA	D5 mm	D mm	B mm	K mm	ANT. BOLTER	BOLT	D2 mm	VEKT kg	ART. NR.
200	219,1	221,5	340	24	295	8	M20	22	9,38	1254429
250	273,0	276,0	395	26	350	12	M20	22	11,90	1254439
300	323,9	327,0	445	26	400	12	M20	22	13,70	1254444
350	355,6	359,0	505	28	460	16	M20	22	20,40	1254449
400	406,4	410,0	565	32	515	16	M24	26	27,70	1254459
450	457,0	461,0	615	34	565	20	M24	26	31,90	1254469
500	508,0	512,0	670	34	620	20	M24	26	36,30	1254474
600	610,0	614,0	780	36	725	20	M27	30	47,30	1254479
700	711,0	716,0	895	38	840	24	M27	30	64,30	
800	813,0	818,0	1015	42	950	24	M30	33	84,10	