


STÅLBEND 90°, R=1,5 D

Materiale P235GH TC1/EN 10253-2

DIN 2605-1 (ST 35.8/I)

Sertifikat EN 10204-3.1 tilgjengelig

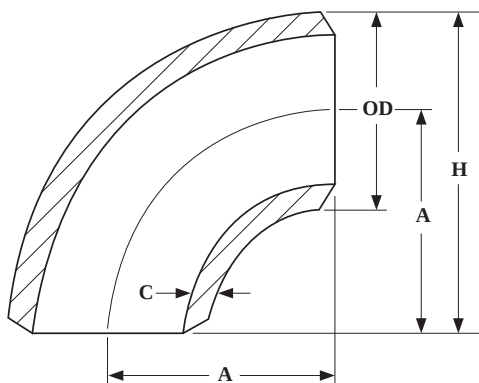

OD mm	t mm	A mm	H mm	VEKT kg	ART. NR
21,3	2,0	28,0	39,0	0,04	1150766
26,9	2,3	28,5	42,0	0,06	1150788
26,9	4,0	28,5	42,0	0,10	1163077
33,7	2,6	38,0	55,0	0,12	1150822
33,7	4,0	38,0	55,0	0,18	1163355
33,7	6,3	38,0	55,0	0,26	1163399
42,4	2,6	48,0	69,0	0,19	1150844
42,4	4,5	48,0	69,0	0,32	1163588
48,3	2,6	57,0	81,0	0,26	1150866
48,3	4,5	57,0	81,0	0,44	1163822
48,3	6,3	57,0	81,0	0,52	1163855
48,3	8,0	57,0	81,0	0,59	1163877
60,3	2,9	76,0	106,0	0,49	1150899
60,3	4,5	76,0	106,0	0,74	1164177
60,3	6,3	76,0	106,0	1,00	1164211
60,3	8,0	76,0	106,0	1,23	1164233
60,3	10,0	76,0	106,0	1,48	1164255
76,1	2,9	95,0	133,0	0,78	1150933
76,1	4,5	95,0	133,0	1,19	1164544
76,1	6,3	95,0	133,0	1,62	1164577
76,1	8,0	95,0	133,0	2,01	1164599
76,1	10,0	95,0	133,0	2,43	1164622
76,1	12,5	95,0	133,0	2,93	1164633
88,9	3,2	114,5	159,0	1,22	1150955
88,9	4,5	114,5	159,0	1,69	1164777
88,9	6,3	114,5	159,0	2,31	1164811
88,9	8,0	114,5	159,0	2,87	1164833
88,9	10,0	114,5	159,0	3,50	1164855
88,9	12,5	114,5	159,0	4,24	1164858

OD mm	t mm	A mm	H mm	VEKT kg	ART. NR
114,3	3,6	152,5	210,0	2,36	1150988
114,3	4,5	152,5	210,0	2,92	1165088
114,3	6,3	152,5	210,0	4,02	1165149
114,3	8,0	152,5	210,0	5,03	1165193
114,3	10,0	152,5	210,0	6,16	1165237
114,3	12,5	152,5	210,0	7,52	1165263
139,7	4,0	190,4	260,0	4,01	1151033
139,7	4,5	190,4	260,0	4,49	1165099
139,7	6,3	190,4	260,0	6,20	1165765
139,7	8,0	190,4	260,0	7,78	1165809
139,7	10,0	190,4	260,0	9,57	1165853
139,7	12,5	190,4	260,0	11,70	1165877
168,3	4,5	228,5	313,0	6,53	1151066
168,3	6,3	228,5	313,0	9,04	1166293
168,3	8,8	228,5	313,0	12,40	1166359
168,3	10,0	228,5	313,0	15,30	1166381
168,3	12,5	228,5	313,0	17,20	1166415
219,1	6,3	305,0	415,0	15,80	1151099
219,1	8,8	305,0	415,0	21,90	1166777
219,1	10,0	305,0	415,0	24,70	1166799
219,1	12,5	305,0	415,0	30,50	1166843
273,0	6,3	381,0	517,0	24,80	1151122
273,0	8,8	381,0	517,0	34,30	1167041
323,9	7,1	457	619	39,8	1151133
323,9	8,8	457	619	49,10	1167173
355,6	8,0	553,5	711	71,40	1151144
355,6	10,0	553,5	711,0	88,60	1167283
406,4	8,8	609,5	813	82,60	1151155
508,0	11,0	762,0	1016,0	161,00	1151177